

# Panasonic



65-inch Class 1080p Hospitality LED HDTV

## TH-65LRU60

### Product specification (design and specification subject to change without notice)

#### ■ DISPLAY PANEL

Screen Size	64.5 -inch
Aspect ratio	16:9
Panel	1080p (WSXGA) / Edge-lit LED
Effective Display Area (W x H)	56.2" x 31.6" (1,428 x 804 mm)
Resolution (H x V)	1,920 x 1,080 pixel
Panel Brightness	400 cd/m <sup>2</sup>
Intelligent Scene Controller	Yes

#### ■ RECEIVING SYSTEM

ATSC/NTSC/QAM	VHF/ UHF: 2 - 69, CATV: 1 - 135
FTG HD Support	EBL (Embedded b-LAN) Requires FMA-PA101 or Local Authentication by USB Memory

#### ■ VIDEO

VIDEO CODEC	MPEG2, MPEG4/H.264
-------------	--------------------

#### ■ CONNECTION TERMINAL

RF in (Antenna/Cable)	1
Video In	RCA x 1 (rear (share with component)), RCA x 1 (side) 1.0 V [p-p] (75Ω)
Audio In (L/R)	RCA x 1 (rear (share with component)), RCA x 1 (side) 0.5 V [rms]
Component Video In	RCA x 1 set (Y Pb Pr) (rear (share with video)) Y : with sync 1.0 V [p-p] (75Ω) Pb, Pr : ±0.35 V [p-p] (75Ω)
Audio In (L/R)	RCA x 1 set (rear (share with video)) 0.5 V [rms]
HDMI In	HDMI TYPE A connector x 2 (rear), x 1 (side)
PC In	MINI D-sub 15pin x1 (female, rear) R, G, B : 0.7 V [p-p] (75Ω) HD/VD : 1.0 - 5.0 V [p-p] (high impedance)
Audio In (L/R)	3.5 mm jack x 1 (rear) 0.5 V [rms]
Audio Out (Digital / SPDIF)	Optical x 1 (rear)
Audio Out (Analog L/R)	3.5 mm jack x 1 (rear) 0.5 V [rms]
USB Slot	1 (side)

#### ■ CONTROL TERMINAL

DATA / MTI	RJ-11(6pin) x 1 (rear) (Compatible with LodgeNet game controller)
Serial Port	3.5 mm jack x 1 (rear), RS232C

#### ■ ELECTRICAL

Power Requirements	110-127 V AC, 60Hz (Detachable AC Power Cord 90.6" (2.3 m))
Power Consumption	170 W
On mode Average Power Consumption*	58.5 W (Energy star 6.0, CEC)
Stand-by Power	Under 1.0 W

\*Based on IEC 62087 Ed.2 section 11.6.1 measurement method

#### ■ AUDIO

Audio Output Power	10W + 10W
Invisible Speaker System Details	1 way 2 bottom Speaker
Bass/Treble/Barance controls	Yes

#### ■ MECHANICAL

Including TV Stand (W x H x D)	57.5" x 35.6" x 13.2" (1,459 x 902 x 333 mm)
TV Set Only (W x H x D)	57.5" x 33.4" x 2.1" (1,459 x 846 x 52 mm)
Carton Dimensions (W x H x D)	68.9" x 37.3" x 8.8" (1,750 x 946 x 223 mm)
Including TV Stand (Weight)	approx. 82.7 lb. (37.5 kg)
TV Set Only (Weight)	approx. 72.8 lb. (33.0 kg)
Gross weight	approx. 101.5 lb. (46.0 kg)
Cabinet Color	Glossy Black
Pitch for Wall-Hanging	VESA Compliant W400 x H400 mm

#### ■ ENVIRONMENTAL

Operating environment	Temperature : 32°F to 95°F (0°C to 35°C)
	Humidity : 20% to 80% (Non condensation)
Storage environment	Temperature : -4°F to 140°F (-20°C to 60°C)
	Humidity : 20% to 90% (Non condensation)

UPC Code	885170123113
----------	--------------

**MAIN FEATURE**

VIERA Link™, HDAVI Control™	Yes
Integrated Pro:Idiom	Yes
Local Authentication	Yes
Welcome Image	Yes
USB Slot	Image Viewer (JPEG playback), Cloning
OFF Timer	15/30/60/90 minutes
Hotel Mode	Initial INPUT Initial Channel Initial VOL level Maximum VOL level Button Lock Power Control


**ACCESSORIES**

Included Accessories	Stand (Not support the Rotate Function) AC Power Cord 90.6" (2.3 m) Remote control transmitter (N2QAYB000820) Batteries for the Remote Control Transmitter (AA Battery x 2) Operating Instruction
----------------------	--

**STANDARD (CERTIFICATIONS)**

Safety Regulations	UL6500 Ver.2, cUL, BETS-7
Radiation Regulations	FCC Part 15 Class-B, ICES-003


**DIMENSIONS**

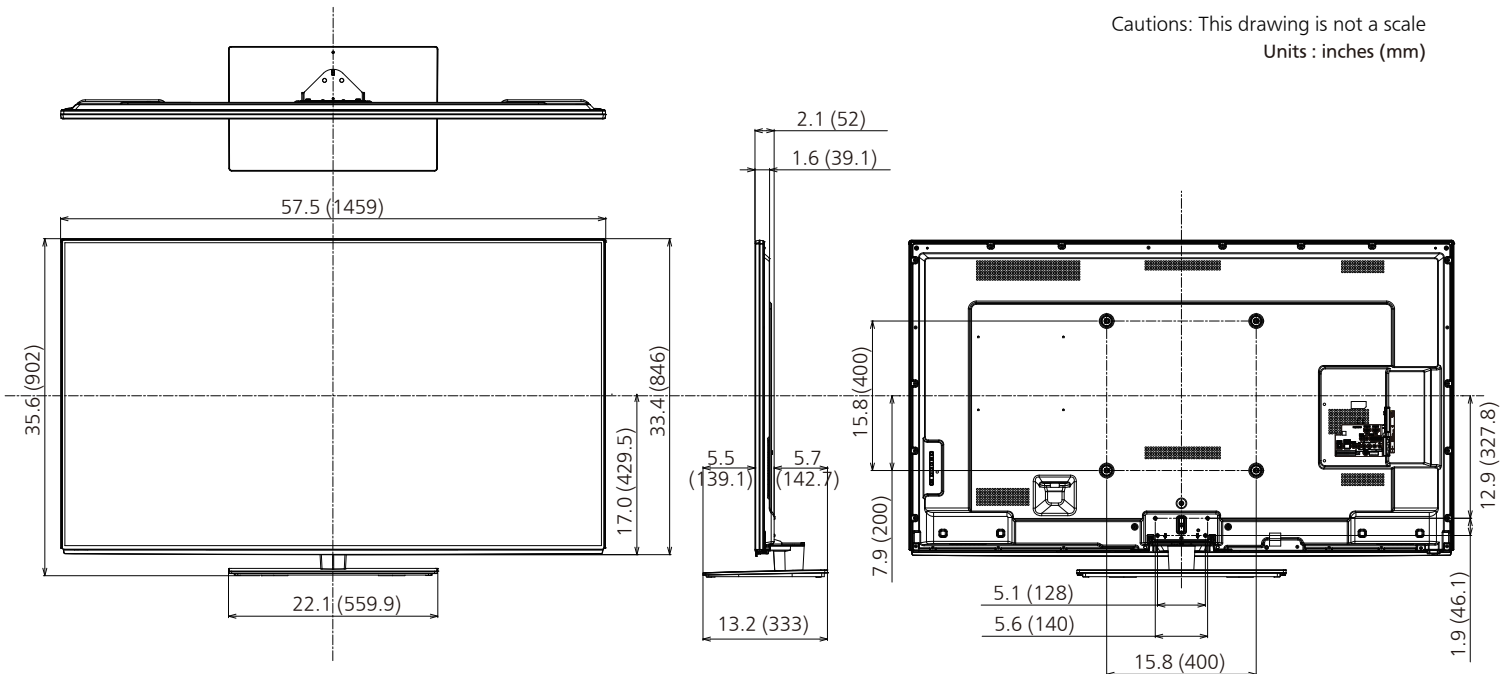

Cautions: This drawing is not a scale  
Units : inches (mm)

**CONNECTION TERMINAL**

<rear>

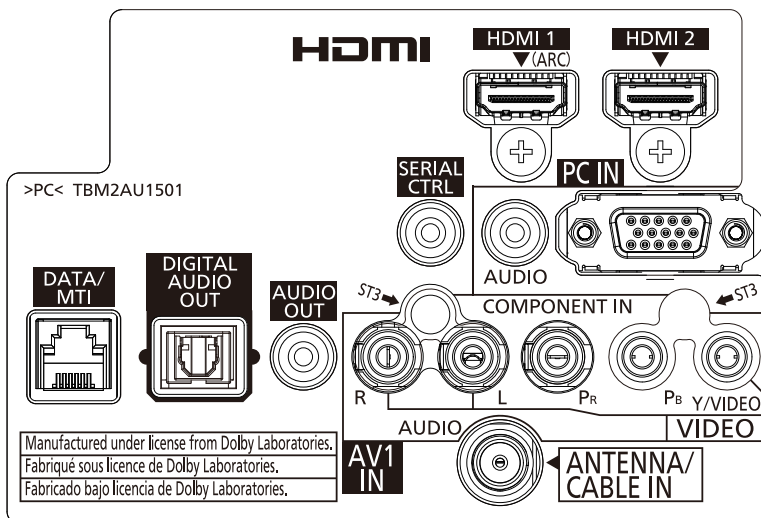

<side>

