

Notes on upgrading the Extension Software, WV-SAE200 TYPE3 for WV-SFV481/SFN480

This document describes important notes while using the cameras with the software as follow;

➤ **Cameras**

WV-SFV481 and WV-SFN480

➤ **Software**

**Extension Software, WV-SAE200 TYPE3
(Not included WV-SAE200 TYPE1/TYPE2)**



The table shows recommended combination between firmware version on camera and software version.

Notes:

*: It works but recommend to upgrade latest ver.

** : It might not work depends on configurations.

		Extension Software WV-SAE200 TYPE3		
		V1.03	V1.05	V1.20
		(1 st release)	(2 nd release)	(New)
Firmware version for WV-SFV481/SFN480	V1.02	Incompatible	Incompatible	Incompatible
	V1.11	Yes (Recommended)	No ** (Not recommended)	x ** (Not recommended)
	V1.12	Yes *	Yes (Recommended)	x ** (Not recommended)
	V1.13	Yes *	Yes (Recommended)	x ** (Not recommended)
	V1.14	Yes *	Yes (Recommended)	x ** (Not recommended)
	V1.15	Yes *	Yes (Recommended)	x ** (Not recommended)
	V2.01	x ** (Not recommended)	x ** (Not recommended)	x ** (Not recommended)
	V2.02	x ** (Not recommended)	x ** (Not recommended)	Yes (Recommended)



➤ Procedures how to upgrade

When upgrading the Extension software WV-SAE200 TYPE3 version 1.20 and WV-SFV481/SFN480 firmware from version 1.xx to 2.01 or later, in a case the Extension software WV-SAE200 TYPE3 (V1.03 or 1.05) has been installed.

!!!Note!!! Do not change configuration setting while in the STEP 1 to STEP3. Or, it may be a cause of failure.

STEP1

Uninstall the older version of Extension Software

*: License key will be kept.

*: Configuration Settings will be kept except the followings

- Choice of VMD alarm will be "VMD".
- Schedule of i-VMD will be deleted.

*: Please backup configuration settings if necessary.

STEP2

Uninstall the Extension Software version 1.20

STEP3

Upgrade camera firmware to version 9.99,
then upgrade firmware version 2.02.

STEP4

Restore the following configuration settings on camera

Alarm type should be selected to "i-VMD".

Make the Schedule settings for i-VMD if necessary.



➤ Procedures how to upgrade

When upgrading the Extension software WV-SAE200 TYPE3 version 1.20 and WV-SFV481/SFN480 firmware from version 2.01 to 2.01 or later, in a case the Extension software WV-SAE200 TYPE3 (V1.03 or 1.05) has been installed.

!!!Note!!! Do not change configuration setting while in the STEP 1 to STEP3. Or, it may be a cause of failure.

STEP1

Uninstall the older version of Extension Software

*: License key will be kept.

*: Configuration Settings will be kept except the followings

- Choice of VMD alarm will be "VMD".
- Schedule of i-VMD will be deleted.

*: Please backup configuration settings if necessary.

STEP2

Uninstall the Extension Software version 1.20

STEP3

Upgrade camera firmware to version 2.02.

STEP4

Restore the following configuration settings on camera

Alarm type should be selected to "i-VMD".

Make the Schedule settings for i-VMD if necessary.



- **How to make sure the firmware version**
You can see the firmware version by following procedure.

Ext. software

Unique Information	
MPR ID	0000-0100-0000-0001
Remaining ROM	3996 kbytes
Remaining RAM	1048 kbytes
i-VMD / Face detection	<input type="button" value="Uninstall"/>
software version	1.00
Status	0000-0100-0000-0002
Setup menu	<input type="button" value="Setup >>"/>

Install new Ext. software

i-VMD / Face detection ... Upgrade


Please wait and do not operate the browser during install.

Use this button at the STEP1

DO NOT USE this at the STPE1.



- **Alarm (Firmware V2.02 (and newer), Extension software V1.20 (and newer))**
“VMD” will be selected automatically if it were inappropriate combination.

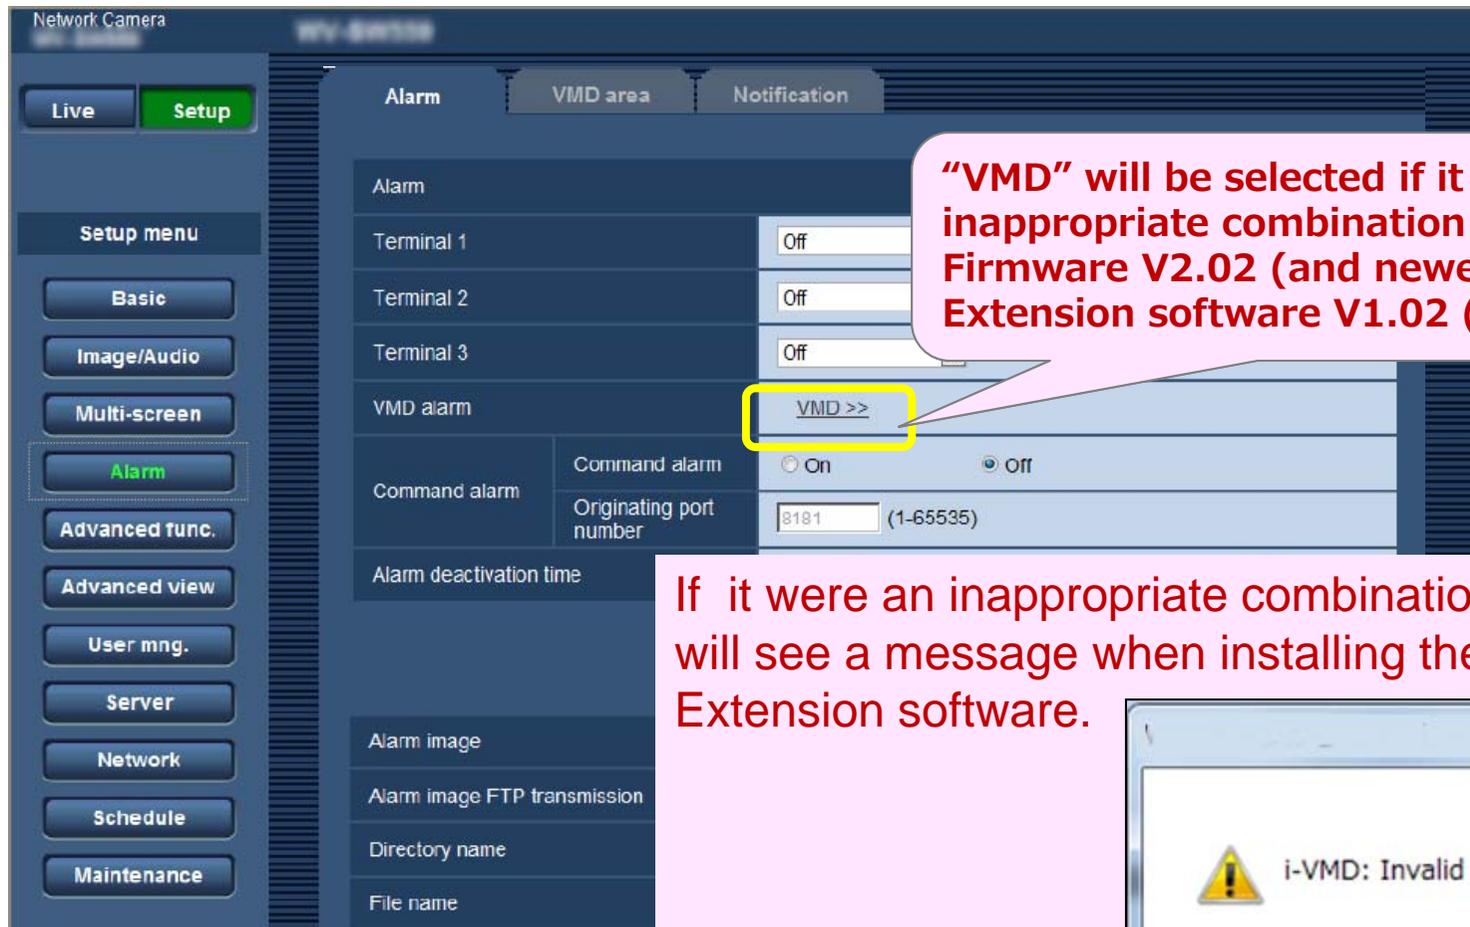

“VMD” will be selected if it were an inappropriate combination after Firmware V2.02 (and newer) and Extension software V1.02 (and newer).

If it were an inappropriate combination, you will see a message when installing the Extension software.

