

Panasonic



50-inch Class 1080p Hospitality LED HDTV

TH-50LRU60

Product specification (design and specification subject to change without notice)

■ DISPLAY PANEL

Screen Size	49.5 -inch
Aspect ratio	16:9
Panel	IPS 1080p (WSXGA)
Effective Display Area (W x H)	43.1" x 24.3" (1,096 x 616 mm)
Resolution (H x V)	1,920 x 1,080 pixel
Brightness (Panel)	250 cd/m ²
Viewing Angle	178 degrees
Intelligent Scene Controller	Yes

■ RECEIVING SYSTEM

ATSC/NTSC/QAM	VHF/ UHF: 2 - 69, CATV: 1 - 135
FTG HD Support	EBL (Embedded b-LAN) Requires FMA-PA101 or Local Authentication by USB Memory

■ VIDEO

VIDEO CODEC	MPEG2, MPEG4/H.264
-------------	--------------------

■ CONNECTION TERMINAL

RF in (Antenna/Cable)	1
Video In	RCA x 1 (rear), RCA x 1 (side)
Audio In (L/R)	RCA x 1 set (rear (share with component)), x 1 set (side)
Component Video In	RCA x 1 set (Y Pb Pr) (rear)
Audio In (L/R)	RCA x 1 set (rear)
HDMI In	HDMI TYPE A connector x 2 (rear), x 1 (side)
PC In	MINI D-sub 15pin x1 (female, rear)
Audio In (L/R)	3.5 mm jack x 1 (rear)
Audio Out (Digital / SPDIF)	Optical x 1 (rear)
Audio Out (Analog L/R)	3.5 mm jack x 1 (rear)
USB Slot	1

■ CONTROL TERMINAL

DATA / MTI	RJ-11(6pin) x 1 (rear) (Compatible with LodgeNet game controller)
Serial Port	3.5 mm jack x 1 (rear), RS232C

■ ELECTRICAL

Power Requirements	110-127 V AC, 60Hz (Detachable AC Power Cord 90.6" (2.3 m))
Power Consumption	125 W
On mode Average Power Consumption*	46.5 W (Energy star 6.0, CEC)
Stand-by Power	Under 1.0 W

*Based on IEC 62087 Ed.2 section 11.6.1 measurement method

■ AUDIO

Audio Output Power	10W + 10W
Invisible Speaker System Details	1 way 2 bottom Speaker
Bass/Treble/Barance controls	Yes

■ MECHANICAL

Including TV Stand (W x H x D)	45.0" x 29.1" x 11.1" (1,141 x 740 x 280 mm)
TV Set Only (W x H x D)	45.0" x 26.6" x 3.5" (1,141 x 675 x 88 mm)
Carton Dimensions (W x H x D)	58.1" x 29.8" x 6.2" (1,474 x 756 x 156 mm)
Including TV Stand (Weight)	approx. 41.9 lb. (19.0 kg)
TV Set Only (Weight)	approx. 35.3 lb. (16.0 kg)
Gross weight	approx. 50.7 lb. (23.0 kg)
Cabinet Color	Glossy Black
Pitch for Wall-Hanging	VESA Compliant W400 x H400 mm

■ ENVIRONMENTAL

Operating environment	Temperature	: 32°F to 95°F (0°C to 35°C)
	Humidity	: 20% to 80% (Non condensation)
Storage environment	Temperature	: -4°F to 140°F (-20°C to 60°C)
	Humidity	: 20% to 90% (Non condensation)

UPC Code	885170123595
----------	--------------

MAIN FEATURE

VIERA Link™, HDAVI Control™	Yes
Integrated Pro:Idiom	Yes
Local Authentication	Yes
Welcome Image	Yes
USB Slot	Image Viewer (JPEG playback), Cloning
OFF Timer	15/30/60/90 minutes
Hotel Mode	Initial INPUT Initial Channel Initial VOL level Maximum VOL level Button Lock Power Control

ACCESSORIES


Included Accessories	Swivel Stand (Rotate Angle : 15 degrees) AC Power Cord 90.6" (2.3 m) Antitheft Screw for Stand Remote control transmitter (N2QAYB000820) Batteries for the Remote Control Transmitter (AA Battery x 2) Security Lockdown Screws (Security Bit : Optional) Operating Instruction
----------------------	---

STANDARD (CERTIFICATIONS)

Safety Regulations	UL6500 Ver.2, cUL, BETS-7
Radiation Regulations	FCC Part 15 Class-B, ICES-003
ENERGY STAR 6.0, CEC	Yes


DIMENSIONS

Cautions: This drawing is not a scale
Units : inches (mm)

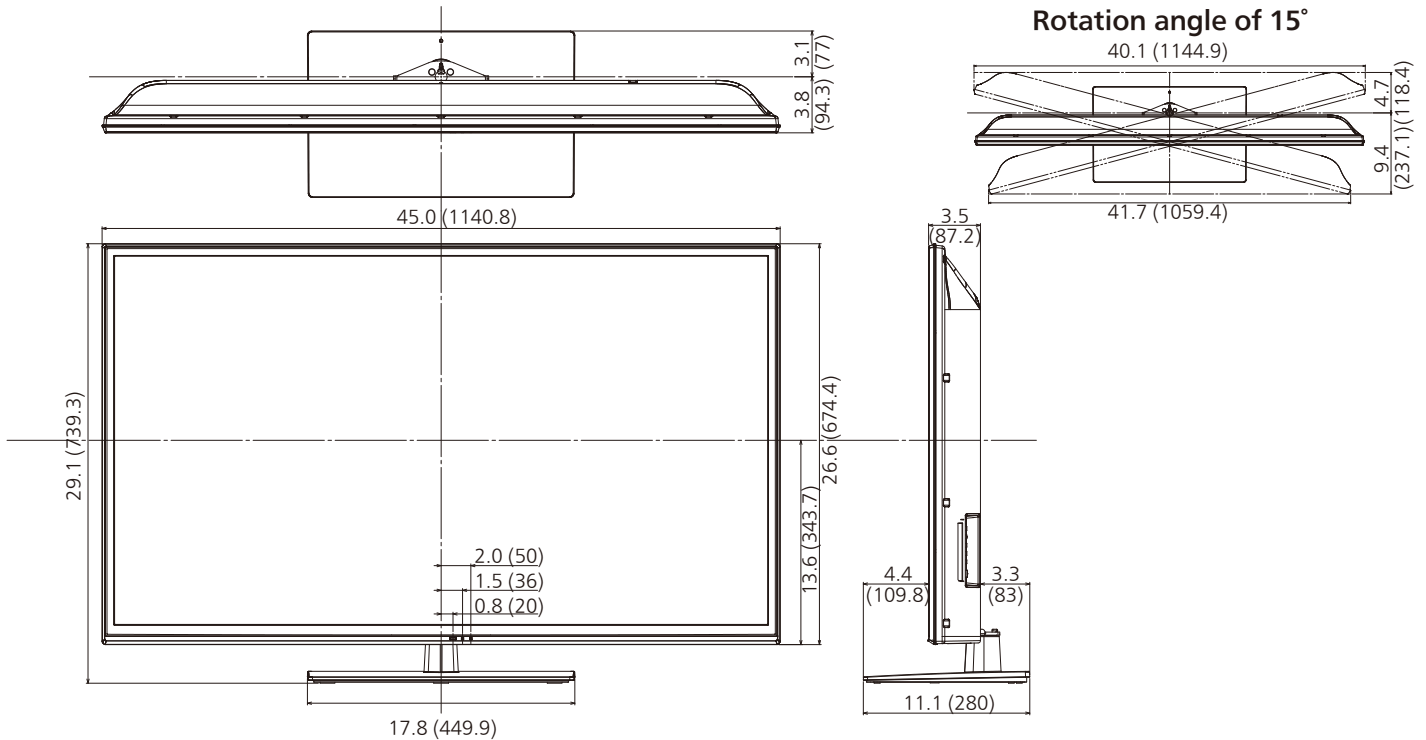

CONNECTION TERMINAL

<rear>

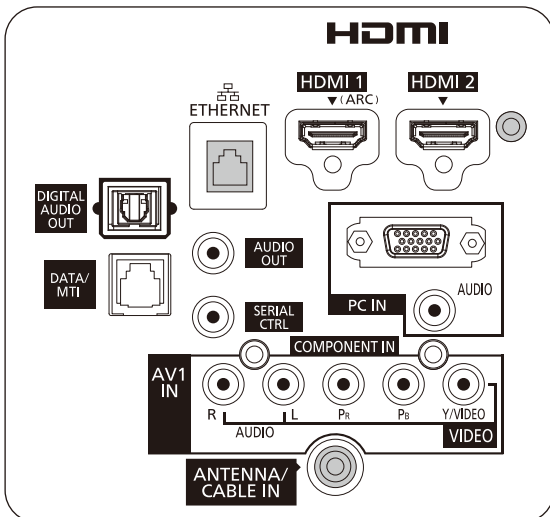

<side>

