



84-inch Class 4K UHD LCD Display TH-84LQ70LU

● Product specification (design and specification subject to change without notice)

■ DISPLAY PANEL

Screen Size (Diagonal)	84.0-inch (2134.6 mm)
Panel Type	IPS / Edge-LED
Aspect Ratio	16:9
Effective Display Area (W x H)	73.3" x 41.3" (1860 x 1047 mm)
Number of Pixels (H x V)	3840 x 2160 pixels
Brightness	500 cd/m ²
Contrast Ratio	1400:1
Dynamic Contrast Ratio	500000:1
Response Time	12 ms (G to G)
Viewing Angle (Horizontal / Vertical)	178° / 178°
Panel Life Time	approx. 50000 hours (typ)*

* When the panel lifetime is at 50% of the brightness under the condition of 25 degrees Celsius (+/- 2 degrees Celsius).
Panel lifetime may be shortened due to usage environment.

■ CONNECTION TERMINAL

HDMI IN	HDMI TYPE A Connector x 4 HDMI 1 *1 / HDMI 2 *1 (Up to 4K@50/60 Hz) HDMI 3 *1 / HDMI 4 *2 (Up to 2K@50/60 Hz)
DisplayPort IN	DisplayPort x 1 (DP1.2a) *2
DVI-D IN	DVI-D 24 Pin x 1 *3
AUDIO IN (L/R)	Stereo mini jack (M3) x 1 set (shared with PC IN)
PC IN	Mini D-sub 15Pin x 1 (Female) *4
AUDIO IN (L/R)	Stereo mini jack (M3) x 1 set (shared with DVI-D IN)
Function Slot	SLOT NX x 2 *5 (Vacant)

*1 : HDCP1.4 supported, Embedded audio supported

*2 : HDCP1.3 supported, Embedded audio supported

*3 : Compliance with DVI Revision 1.0, HDCP1.1 supported

*4 : RGB / YPbPr switcable

*5 : Option 3G-SDI terminal board TY-TBN03G: (w/ active through)

■ CONTROL

SERIAL IN	D-sub 9pin x 1 *1
LAN	RJ45 x 1 100BASE-TX *2
DIGITAL LINK	RJ45 x 1 100BASE-TX (shard with LAN)

*1 : RS-232C compatible

*2 : PLink compatible (shared with DIGITAL LINK)

■ AUDIO

AUDIO OUT	Stereo mini jack (M3) x 1
Built in Speaker	20 W [10 W + 10 W] (10%THD)

■ ELECTRICAL

Power Requirements	110 - 127 V, 50 / 60 Hz
Power Consumption	560 W (574 VA) 1911 BTU
On Mode Average Power Consumption*	420 W
Power Off Condition	0.3 W
Stand-by Condition	0.5 W
Network Stand-by Mode	3 W

*Based on IEC 62087 Ed.2 measurement method

■ MECHANICAL

Dimensions (W x H x D)	76.7" x 44.9" x 3.7" (1949 x 1141 x 92 mm)
Carton Dimensions (W x H x D)	84.9" x 53.6" x 15.9" (2156 x 1361 x 404 mm)
Weight	approx. 185.2 lbs (84 kg)
Gross Weight	approx. 234 lbs (106 kg)
Cabinet Material / Color	Metal / Black
Protection Glass	No
Mount Screw Holes	Diameter: M16, Valid screw depth: 1.1" (26 mm)
Eyebolt Screw Holes	Diameter: M12, Valid screw depth: 1" (25 mm)

■ INSTALLATION

Orientation	Landscape / Portrait
Tilting Angle	10 degrees with landscape setting / 5 degrees with portrait setting

*Please contact your sales representative with regard to the tilt angle before installation.

■ ENVIRONMENTAL

Operating Environment	Temperature	: 32°F to 104°F (0°C to 40°C) *1
		: 32°F to 95°F (0°C to 35°C) *2
	Humidity	: 20% to 80% (No condensation)
Storage Environment	Altitude	: 0 to 7874 feet (0 to 2400 m) *3
	Temperature	: -4°F to 140°F (-20°C to 60°C)
	Humidity	: 20% to 80% (No condensation)

*1 : for up to 4593 ft (1400 m) altitude *2 : for between 4593 ft (1400 m) and 7874 ft (2400 m) altitude

*3 : When using the unit where it is 4593 ft (1400 m) and higher and below 7874 ft (2400 m) above sea level, make sure [High altitude mode] is set to [ON].

UPC Code	885170259409
----------	--------------

MAIN FEATURE

Automatic Picture Position	Yes
4 Input Multi Display (up to FHD)	Yes
Screen Saver	Yes
PC Power Management	Yes
HDMI Power Management	Yes
DVI-D Power Management	Yes
ECO Mode	Yes
Button Lock	Yes
Remote-control Lock	Yes
Power-on Screen Delay	Yes
Input Search	Yes
Local Dimming	Yes
Operating Time*	24 h/day

*In case of running for a long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a movie images.

OPTIONAL ACCESSORIES

3G-SDI Terminal Board	TY-TBN03G*1
Pedestal	TY-ST85P12
Mobile Stand	TY-ST85PB1
Wall-hanging Bracket	TY-WK85PV12
Ceiling-hanging Bracket	TY-CE85PS12*2
Digital Interface Box	ET-YFB100G

*1 2 boards (total 3G-SDI x 4) required for 4K@50/60 Hz,
1 board (total 3G-SDI x 2) required for up to 4K@25/30 Hz
*2 Tilt angle limited to 10 degree maximum

STANDARD (CERTIFICATIONS)


Safety Regulations	UL60065, CAN/CSA22.2 No 60065:03
Radiation Regulations	FCC Part15 Class B, ICES-003

INCLUDED ACCESSORIES

AC power cord (Approx. 118" (3 m)), Operating Instructions (Book), (CD-ROM), Remote Control Transmitter, Batteries x 2, Clamper, Eyebolt cap, Eyebolt, Panasonic badge, Panasonic badge attachment plate, Allen wrench

DIMENSIONS

Cautions: This drawing is not a scale
Units : inches (mm)

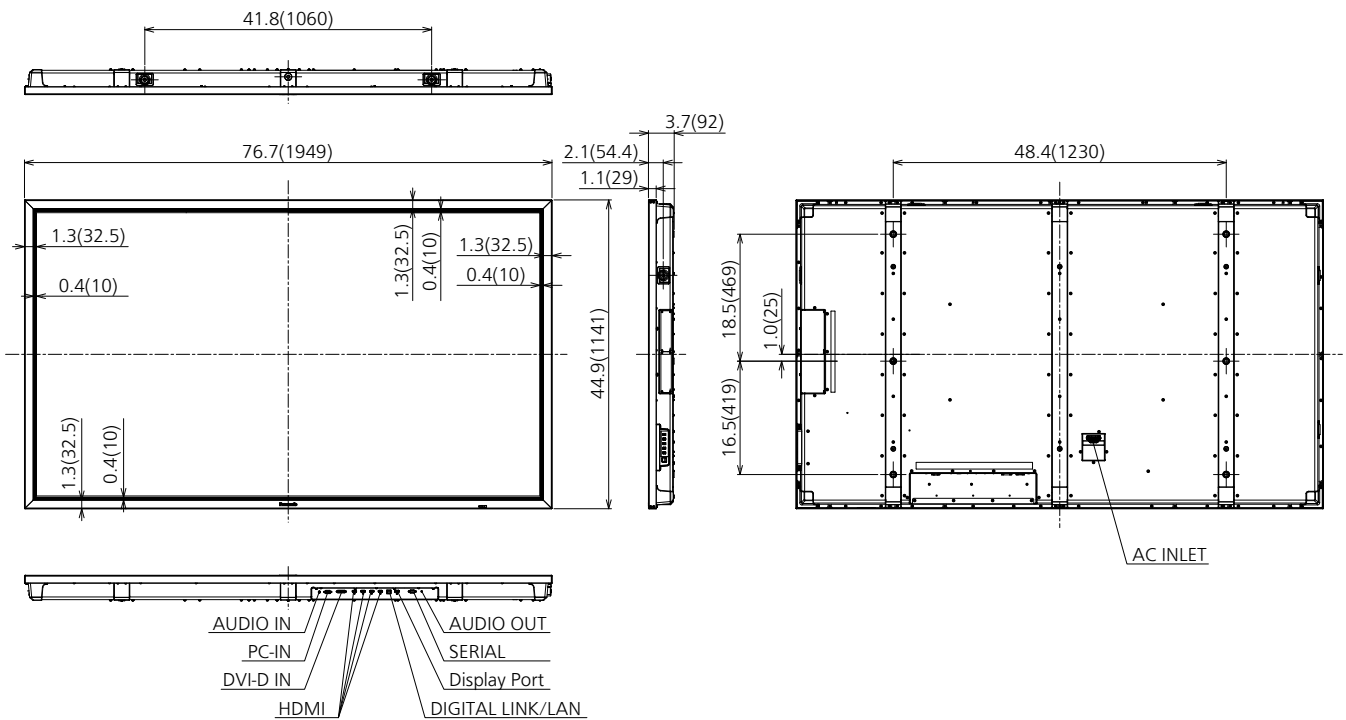

CONNECTION TERMINAL



* Specifications and appearance are subject to change without notice.

List of correspondence signals

Following signal timing is preset to this unit.

These preset signals are written on EDID of the each input terminal.(Except for *6)

In many cases, it is possible to receive the signals other than below with this unit's multi scan function.
(Except for 4K signal)

✓ : Preset signal

Signal name	H-Freq. (kHz)	V-Freq. (Hz)	Dot clock frequency (MHz)	PC IN	HDMI 1 HDMI 2	HDMI 3 HDMI 4 DVI-D IN	DIGITAL LINK	Display Port
525 (480) / 60i	15.73	59.94	13.5	✓				
625 (576) / 50i	15.63	50.00	13.5	✓				
525 (480) / 60i*2	15.75	60.00	27.0		✓	✓	✓	
625 (576) / 50i	15.63	50.00	27.0		✓	✓	✓	
525 (480) / 60p*2	31.50	60.00	27.0	✓	✓	✓	✓	
625 (576) / 50p	31.25	50.00	27.0	✓	✓	✓	✓	
750 (720) / 60p*2	45.00	60.00	74.25	✓	✓	✓	✓	✓
750 (720) / 50p	37.50	50.00	74.25	✓	✓	✓	✓	✓
1125 (1080) / 60i*1*2	33.75	60.00	74.25	✓	✓	✓	✓	
1125 (1080) / 50i*1	28.13	50.00	74.25	✓	✓	✓	✓	
1125 (1080) / 24p*1*2	27.00	24.00	74.25	✓	✓	✓	✓	
1125 (1080) / 25p*1	28.13	25.00	74.25	✓	✓	✓	✓	
1125 (1080) / 30p*1*2	33.75	30.00	74.25	✓	✓	✓	✓	
1125 (1080) / 60p*1*2	67.50	60.00	148.5	✓	✓	✓	✓	✓
1125 (1080) / 50p*1	56.25	50.00	148.5	✓	✓	✓	✓	✓
640 × 480	31.47	59.94	25.18	✓	✓	✓	✓	✓
800 × 600	37.88	60.32	40.00	✓	✓	✓	✓	✓
1024 × 768	48.36	60.00	65.00	✓	✓	✓	✓	✓
1280 × 768	47.70	60.00	80.14	✓	✓*6	✓	✓	✓
1366 × 768	48.39	60.04	86.71	✓	✓*6	✓	✓	✓
1280 × 1024	63.98	60.02	108.0	✓	✓	✓	✓	✓
1600 × 900	60.00	60.00	108.0	✓	✓	✓	✓	✓
1920 × 1080	67.50	60.00	148.5	✓	✓	✓	✓	✓
1920 × 1200	74.04	59.95	154.0	✓	✓	✓	✓	✓
4K signal								
3840 / 24p*2	54.00	24.00	297.0		✓		✓	✓
3840 / 25p	56.25	25.00	297.0		✓		✓	✓
3840 / 30p*2	67.50	30.00	297.0		✓		✓	✓
4096 / 24p*2	54.00	24.00	297.0		✓		✓	
3840 / 50p	112.5	50.00	594.0		✓		✓*4	✓*5
3840 / 60p*2	135.0	60.00	594.0		✓		✓*4	✓*5
4096 / 50p	112.5	50.00	594.0		✓		✓*4	
4096 / 60p*2	135.0	60.00	594.0		✓		✓*4	
4K (Dual Link)signal								
3840 / 50p	112.5	50.00	297.0		✓*3			
3840 / 60p*2	135.0	60.00	297.0		✓*3			
4096 / 50p	112.5	50.00	297.0		✓*3*6			
4096 / 60p*2	135.0	60.00	297.0		✓*3*6			

*1: Based on SMPTE 274M standard.

*2: Compatible with frame frequency 1/1.001

*3: The format supports Dual Link.

*4: Supported in YCBCR 4:2:0 format

*5: Supported with MST (Multi Stream Transport) only

*6: Not written on EDID

In some cases, these signals may not be displayed when setting Resolution on your PC.

Note

- Signals without above specification may not be displayed properly.
- For the signals when 3G-SDI Terminal Board with Audio is installed, refer to the manual included with it.