






*i-VMD Type2 : Intruder Detection / Loitering Detection / Direction Detection / Scene Change Detection / Object Detection / Cross Line Detection

Full HD / 1,920 x 1,080 60 fps H.264 Vandal Resistant Network Camera featuring Super Dynamic (WV-SFR631L) HD / 1,280 x 720 60 fps H.264 Vandal Resistant Network Camera featuring Super Dynamic (WV-SFR611L)

Key Features

- **1080p Full HD / 720p HD** images up to **60 fps**^{*1}
 - Approximate 1/3 inches, high sensitivity MOS image sensor
 - Super high resolution at Full HD/1,920 x 1,080 created by high sensitivity MOS image sensor. (WV-SFR631L only)
 - **Multiple H.264 (High profile) streams (max. 4 streams)** and JPEG streams ensure simultaneous real time monitoring and high resolution recording.
 - Maximum Screen Size is 2,048 x 1,536* @30 fps, H.264 (WV-SFR631L only)
* Used by super resolution techniques
 - **Enhanced Super Dynamic**^{*1} and ABS (Adaptive Black Stretch) technologies deliver **133 dB** wider dynamic range compared to conventional cameras.
 - **Smart coding Technology : Group of Pictures (GOP) control** function removes unnecessary information from the frame for realizing efficient encoding. **Auto VIQS** (Variable Image Quality on Specified area) function recognizes the no movement area in a video automatically and lowering the resolution of it to reduce the data size. With the latest bit rate reducing technology, **GOP control, Auto VIQS, 3D-MNR** (Multi process Noise Reduction) and **FDF** (Frequency Divided Filter), the network bandwidth and the disk space of recorder can be saved.
 - High sensitivity with Day/Night (ICR*) function:
WV-SFR631L : 0.04 lx (Color), 0.01 lx (B/W) at F1.3
WV-SFR611L : 0.01 lx (Color), 0.003 lx (B/W) at F1.3
*ICR: IR Cut filter Removal
 - **IR LED** equipped: The equipped infrared LED makes it possible to take pictures at zero lx.
 - **IR LED** is controlled to match the environment, thereby the camera provides clear images of human faces without white blur.
 - New camera attachment bracket allows an **easy camera installation** toward all four directions.
 - **High Speed ABF (Auto Back Focus) and Motorized Zoom** ensures easy installation.
 - Newly developed lens with aperture control function realizes the best focus in any environment.
 - **VIQS** (Variable Image Quality on Specified area) technology allows the designated **eight areas** to retain higher image quality while the excluded area will have a decreased image quality, which enables to use lower image file size and bit rate.
 - Cropping function enables to provide whole image and the part image simultaneously. Up to 4 image capture areas can be specified, and it is also possible to control the sequence.
 - **Face Super Dynamic** technology ensures clear face image.
 - Lens distortion compensation for the distorted images can be adjusted 256 steps.
 - Selectable light control modes:
Outdoor scene, Indoor scene (50 Hz) / Indoor scene (60 Hz), Fix shutter
Indoor scene (50 Hz/60Hz): Flicker caused by fluorescent lightning will be automatically compensated.
 - 3x (WV-SFR631L), 2x (WV-SFR611L) extra optical zoom at 640 x 360 resolution
 - 2x, 4x digital zoom controlled by browser
 - **VMD (Video Motion Detection)** with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
 - Privacy Zone can mask up to 8 private areas, such as house windows and entrances/exits.
 - Alarm sources including 3 terminal input, VMD and Panasonic alarm command can trigger actions such as SDXC/SDHC/SD memory recording, FTP image transfer, E-mail notification, Indication on browser, Alarm terminal output, and Panasonic alarm protocol output.
 - Full duplex bi-directional audio allows interactive communication between camera site and monitoring site.
 - Prioritized stream control: One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
 - **Double SDXC/SDHC/SD Memory card slots** for manual recording (H.264 / JPEG), alarm recording (H.264 / JPEG) and backup upon network failure (H.264 / JPEG). Realize long-term recording and auto backup function.
 - Newly developed dome cover provides clearer images above the horizontal. Thereby, it expands the tilting range of the lens.
 - Face detection function detects the position of human face and the information is sent by XML or video stream. (Optional)
 - Can be added new intelligent extension software (Optional) in addition to built-in VMD (Video Motion Detection), alarm function.
 - **Fog compensation function** equipped as standard.
 - **HLC (High Light Compensation)** technology reduces strong light sources such as vehicle headlights to prevent camera being blinded.
 - **Super Chroma Compensation** function realizes a better color reproducibility even in low illumination.
 - H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management. Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.
 - Internet mode: H.264 images can be transmitted over HTTP protocol.
 - Multi-language: English / Italian / French / German / Spanish / Portuguese / Russian / Chinese / Japanese
 - Supports SSL, DDNS (viewnetcam, RFC2136)
 - Vandal resistant mechanism for high reliability
- ^{*1} Super Dynamic function is automatically set off on 60 fps mode

Optional Accessories

Ceiling Mount Bracket WV-Q105A 	Ceiling Mount Bracket WV-Q174B 	Smoke Dome Cover WV-CR1S 
--	---	---


Specifications

Camera	Image Sensor	Approx. 1/3 type MOS image sensor
	Scanning Mode	Progressive scan
	Scanning Area	WV-SFR631L : 5.28 mm (H) x 3.30 mm (V) {7/32 inches(H) x 1/8 inches(V) } WV-SFR611L : 4.86 mm (H) x 3.65 mm (V) {3/16 inches(H) x 5/32 inches(V) }
	Minimum Illumination	WV-SFR631L : Color: less than 0.04 lx, BW: 0.01 lx (F1.3, Maximum shutter : Max. 1/30s, Gain : On(High)) Color: less than 0.03 lx, BW: 0.0007 lx (F1.3, Maximum shutter : Max. 16/30s, Gain : On(High)) ^{*1} WV-SFR611L : Color: less than 0.01 lx, BW: 0.003 lx (F1.3, Maximum shutter : Max. Off (1/30s), Gain : On(High)) Color: less than 0.0007 lx, BW: 0.0002 lx (F1.3, Maximum shutter : Max. 16/30s, Gain:On(High)) ^{*1}
	IR LED Light	Off / Auto (High / Mid / Low)
	IR LED irradiation distance	Approx. 30 m (98.43 feet)
	White Balance	AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K)
	Light Control Mode	Outdoor scene : Automatic integration of ALC and ELC Indoor scene [50 Hz] : Automatic integration of ALC and ELC with flickerless Indoor scene [60 Hz] : Automatic integration of ALC and ELC with flickerless
	Shutter Speed	[2 mega pixel [16 : 9] (60 fps mode) / 1.3 mega pixel [16 : 9] (60 fps mode)] Off (1/60), 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 Other than [2 mega pixel [16 : 9] (60 fps mode) / 1.3 mega pixel [16 : 9] (60 fps mode)] Off (1/30), 3/100, 3/120, 2/100, 2/120, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000
	Super Dynamic ^{*2}	On (High) / On (Normal) / Off
	Face Super Dynamic	On / Off (Only when Super Dynamic : On)
	Adaptive Black Stretch	On / Off (Only when Super Dynamic : Off)
	Fog compensation	On / Off (Only when Super Dynamic / Adaptive black stretch : Off)
	AGC	On (Low) / On (Mid) / On (High) / Off
	Electronic Sensitivity UP	max. 1/1000 s, max. 1/500 s, max. 1/250 s, max. 1/100 s, max. 1/60 s, max. 1/30 s, max. 2/30 s, max. 4/30 s, max. 6/30 s, max. 10/30 s, max. 16/30 s
Day/Night (ICR)	Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC)	
Dynamic Range	133 dB typ. (Super Dynamic : On, Light Control Mode : indoor)	
Digital Noise Reduction	High / Low	
Video Motion Detection	4 areas, Sensitivity : 15 steps, Detection size : 10 steps	
Privacy Zone / VIQS	Up to 8 zones	
Camera Title (OSD)	Up to 20 characters (alphanumeric characters, marks)	
Electric Zoom	TELE / WIDE , Auto Coarse adjustment of Focus	
Focus Adjustment	ABF / MANUAL (Htmi only)	
Lens Distortion Compensation	256 steps	
Lens	Vari Focal Length	2.8 - 10mm (1/8 inches - 13/32 inches)
	Angular Field of View	WV-SFR631L [16 : 9 mode] Horizontal : 28.8° (TELE) - 102.9° (WIDE) Vertical : 16.0° (TELE) - 56.2° (WIDE) [4 : 3 mode] Horizontal : 23.8° (TELE) - 84.6° (WIDE) Vertical : 17.8° (TELE) - 62.6° (WIDE) WV-SFR611L [16 : 9 mode] Horizontal : 26.4° (TELE) - 94.0° (WIDE) Vertical : 14.7° (TELE) - 51.8° (WIDE) [4 : 3 mode] Horizontal : 26.4° (TELE) - 94.0° (WIDE) Vertical : 19.8° (TELE) - 69.5° (WIDE)
	Maximum Aperture Ratio	1 : 1.3 (WIDE) - 1 : 3.0 (TELE) *with Smart DoF (Depth of Field) mode
	Focusing Range	0.3 m - ∞
	Adjusting Angle	Horizontal: ± 180°, Vertical: 0-85°, Image tilt adjustment range: -45°(Left) to +300°(Right)
	Browser GUI	Cropping H.264(1) / H.264(2) / H.264(3) / H.264(4) / H.264(all) / JPEG(1) / JPEG(2) / JPEG(3) Up to 4 image capture areas can be specified Camera Control Brightness, AUX On / Off Display Mode Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only), 20 characters camera title available. Digital Zoom 1x, 2x, 4x controlled by browser GUI Camera Title Up to 20 alphanumeric characters Clock Display Time : 12H/24H, Date : 5 formats on the browser, Summer time (Manual) Alarm Control Reset One Shot Capture A still picture will be displayed on a newly opened window. Audio Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High Audio Output : On / Off Volume adjustment : Low / Middle / High SD Memory Data Download Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. GUI / Setup Menu Language English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese System Log Up to 100 (Items), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Supported OS ^{*3} Microsoft® Windows® 10, Microsoft® Windows® 8.1, Microsoft® Windows® 8, Microsoft® Windows® 7, Microsoft® Windows Vista® Supported Browser Windows® Internet Explorer® 11 (32 bit), Windows® Internet Explorer® 10 (32 bit), Windows® Internet Explorer® 9 (32 bit), Windows® Internet Explorer® 8 (32 bit), Windows® Internet Explorer® 7 (32 bit), Safari®, Google Chrome®, Mozilla Firefox® * with limitations in the part of setting screen
	Network	Network IF 10Base-T / 100Base-TX, RJ45 connector
	Image Resolution	WV-SFR631L *2 mega pixel [16 : 9] (30/60 fps) 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 90 *2 mega pixel [4 : 3] (30 fps) 1,600 x 1,200 / 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 / 160 x 120 *3 mega pixel [4 : 3] (30 fps) *Used by super resolution techniques 2,048 x 1,536 / 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 / 160 x 120
		WV-SFR611L *1.3 mega pixel [16 : 9] (30/60 fps) 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 90 *1.3 mega pixel [4 : 3] (30 fps) 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 / 160 x 120
	H.264 ^{*4}	Transmission Mode
Frame Rate		1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 / 60 fps
Bit Rate/Client		64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 6,144 / 8,192 / 10,240 / 12,288 / 14,336 / 16,384 / 20,480 / 24,576 kbps
Image Quality		Low / Normal / Fine
JPEG	Smart Coding mode	On (Low / Mid / High) / Off (Only when "Variable bit rate" is selected)
	Refresh interval	0.2 / 0.25 / 0.33 / 0.5 / 1 / 2 / 3 / 4 / 5 s
	Transmission Type	Unicast / Multicast
	Image Quality	10 steps
Audio Compression	Refresh interval	0.1 fps - 30 fps (JPEG frame rate will be restricted when displaying both JPEG and H.264 images.)
	Transmission Type	Pull / Push
	Audio Compression	G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps / AAC-LC
	Audio Mode	Off / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex)
Supported Protocol	Authentication for Audio	Level 1 only / Level 2 higher / All users
	Total Bit Rate	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 2,048 / 4,096 / 8,192 kbps / Unlimited
Supported Protocol	IPV6: TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCP6, MLD, ICMP, ARP	
	IPV4: TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTSP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP	


Network	FTP Client	Alarm image transmission, FTP periodic transmission (When the FTP transmission is failed, backup on an optional SDXC/SDHC/SD memory card is available.)	
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)	
	SDXC/SDHC/SD Memory Card (Option)	H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure Compatible SD (SDHC/SDXC) card : Panasonic 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB** model *SDHC card, **SDXC card (except miniSD card and microSD card)	
	Employment of two SD cards	Dual Recording for Redundancy Series Recording for long time	
	Cellular Phone Compatibility	JPEG image, AUX control (by access level)	
	Mobile Terminal Compatibility	iPad, iPhone, iPod touch (iOS 4.2.1 or later), Android™ mobile terminals	
	Alarm	Alarm Source	3 terminals input, VMD, Command alarm, Audio detection alarm
		Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification, Indication on browser, FTP image transfer, Panasonic protocol output
		Alarm Log	With SDXC/SDHC/SD memory card : Up to 50,000 logs for each SD memory card
		Schedule	Alarm / VMD / Access permission / H.264 recording / Scene file
Input/ Output	Monitor Output (for adjustment)	VBS : 1.0 V (p-p)/75 Ω, NTSC / PAL composite, ø3.5mm mini jack MONITOR OUT conversion plug included	
	Microphone/Line Input	MIC IN and Line IN are selectable. ø3.5 mm monaural mini jack (monaural input) (Applicable microphone: Plug-in power type) Supply voltage: 2.5 V ±0.5 V Input impedance: Approx. 2 kΩ (unbalanced)	
	Audio Output	ø3.5 mm stereo mini jack (monaural output) Output impedance: Approx. 600 Ω (unbalanced)	
General	External I/O Terminals	ALARM IN (DAY/NIGHT IN), ALARM IN 2(ALARM OUT), ALARM IN 3(AUX OUT)	
	Safety	UL (UL60950-1), C-UL (CAN/CSA C22.2 No.60950-1), CE, IEC60950-1	
	EMS	FCC (Part15 ClassA), ICES003 ClassA, EN55022 ClassB, EN55024	
	Power Source and Power Consumption	When IR LED is ON WV-SFR631L DC power supply : DC12 V / 760 mA / Approx. 9.1 W PoE (IEEE802.3af compliant) Device : DC48 V / 240 mA / Approx. 11.1 W (Class 0 device) WV-SFR611L DC power supply : DC12 V / 690 mA / Approx. 8.2 W PoE (IEEE802.3af compliant) Device : DC48 V / 200 mA / Approx. 9.4 W (Class 0 device) * ONLY CONNECT DC12 V CLASS 2 POWER SUPPLY.	
	Ambient Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)	
	Ambient Operating Humidity	10 to 90 % (no condensation)	
	Shock Resistance	Compliant with 20 IEC60068-2-75 / IEC 62262 IK10	
	Dimensions	ø129.5 mm x 102.5 mm (H) {ø5-3/32 inches x 4-1/32 inches (H)} Dome radius 41.5 mm (1-5/8 inches)	
	Mass (approx.)	Approx. 0.76 kg (1.68 lbs)	
	Finish	Main body : Aluminum die cast, sail white / Dome section: Clear polycarbonate resin	

*1 Converted value *2 Super Dynamic function is automatically set off on 60 fps mode.
*3 Refer to "Notes on Windows Vista® / Windows® 7 / Windows® 8 / Windows® 8.1 / Windows® 10" on the provided CD-ROM for further information about system requirements for a PC and precautions when using Microsoft® Windows® 10 or Microsoft® Windows® 8.1 or Microsoft® Windows® 8 or Microsoft® Windows® 7 or Microsoft® Windows Vista®.
*4 Transmission for 4 streams can be individually set.

Part Names and Functions

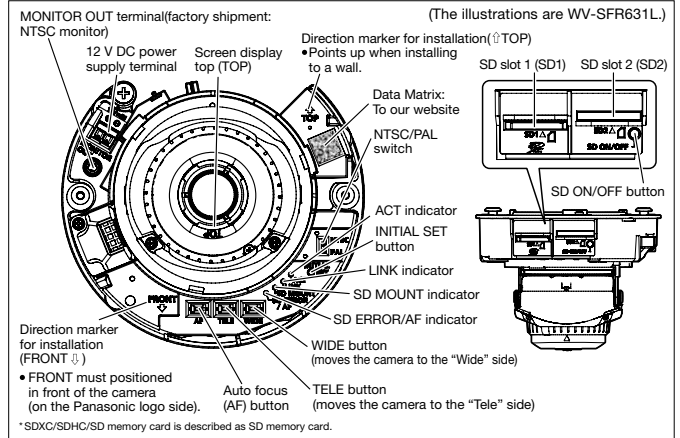

Appearance

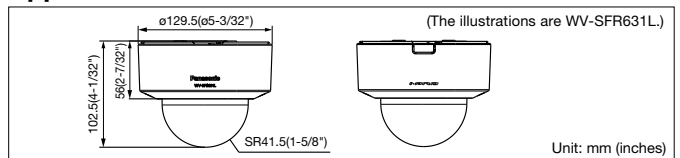

Trademarks and registered trademarks

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- iPad, iPhone and iPod touch are registered trademarks of Apple Inc.
- Android is a trademark of Google Inc.
- "i-PRO SmarHD" logo is trademark or registered trademark of Panasonic Corporation.
- ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
- All other trademarks identified herein are the property of their respective owners.
- Important**
- Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.
- Masses and dimensions are approximate. • Specifications are subject to change without notice.

DISTRIBUTED BY:

Panasonic

<http://security.panasonic.com>

<http://www.facebook.com/PanasonicNetworkCamera>

(2A-116CL)