


Operating Instructions

Included Installation Instructions

Attachment Pipe Bracket

Model No. **WV-Q123A**
(Fine Silver)
WV-Q179
(Light Gray)

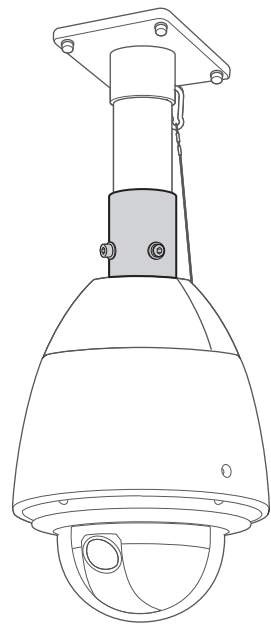

(Camera mounting image)
WV-Q123A

Before attempting to connect or install this product, please read these instructions carefully and save this manual for future use.

For U.S. and Canada:

Panasonic i-PRO Sensing Solutions Corporation of America
800 Gessner Rd, Suite 700 Houston, TX 77024
<https://www.security.us.panasonic.com/>

Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario, L4W 2T3 Canada
1-877-495-0580
<https://www.panasonic.com/ca/>

For Europe and other countries:

Panasonic Corporation
<http://www.panasonic.com>

Panasonic i-PRO Sensing Solutions Co., Ltd.
Fukuoka, Japan

Authorised Representative in EU:

Panasonic Testing Centre
Panasonic Marketing Europe GmbH
Winsbergring 15, 22525 Hamburg, Germany

Preface

This product is used to mount the camera on a locally procured mounting bracket.

For the latest information about the supported cameras, refer to our support website (<https://security.panasonic.com/support/info/> <Control No.:C0501, C0112>).

Standard Accessories

Operating Instructions (this document) 1 pc.
Camera mounting screw (hexagon screw (M6)) 5 pcs.
(of them, 1 for spare)

Precaution

Refer installation work to the dealer.

Installation work requires technique and experience. Failure to observe this may cause fire, electric shock, injury, or damage to the product.

Be sure to consult the dealer.

Do not use this bracket except with suitable cameras.

Failure to observe this may cause a drop resulting in injury or accidents.

Specifications

Ambient operating temperature:	-50 °C to +60 °C (-58 °F to +140 °F)	
Dimensions:	ø58 mm × 85 mm (H)	
	{ø2-9/32 inches × 3-11/32 inches (H)}	
Mass:	Approx. 200 g {0.44 lbs}	
Finish:	Aluminum die cast	Fine silver (WV-Q123A)
		Light gray (WV-Q179)

Precautions for installation

We assume no responsibility for injuries or property damage resulting from failures arising out of improper installation or operation inconsistent with this documentation.

In order to prevent injury, the product must be securely mounted to the wall or sealing according to the Installation Guide of the camera.

Mounting method for this product

This product is designed to be used as a pendant mount camera. If the product is mounted on a desktop or at a slant, it may not work correctly and its lifetime may be shortened.

Make sure to remove this product if it will no longer be used.

Installation


The following explains an example of mounting the camera on a ceiling.

[1] Preparations before installation

Prepare the bracket (locally procured) for mounting the camera.


IMPORTANT:

- The mount bracket (locally procured) should have the configuration that enables fixation of safety wire from camera.

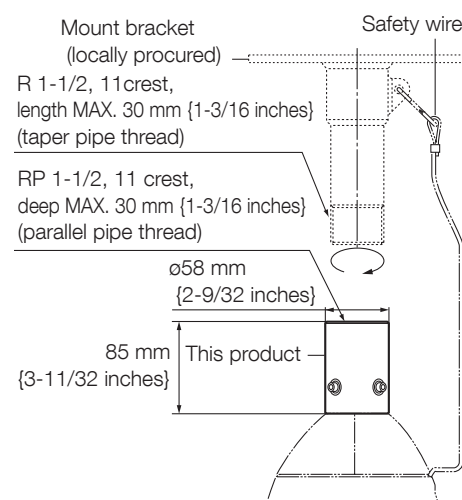

[2] Fix this product to the mount bracket (locally procured).

- Fix this product to the mount bracket.
- Fill the gap between the mount bracket and this product with waterproof material (locally procured) such as silicon clay.

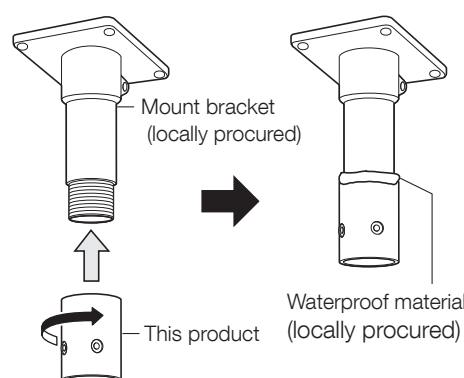


[3] Fix the mount bracket (locally procured) on the installation surface.

- Pass the cables through the mount bracket.
- Fix a mount bracket to the installation surface by using appropriate bolts, nuts or the like (locally procured).

IMPORTANT:

- For details on procedure for attaching mount bracket, read the operating instructions of mount bracket.
- After waterproofing the hole for fixing mount bracket and the port for pulling out the cable on the installation surface, fix the mount bracket on the installation surface.
- Ensure the minimum pull-out strength that has sufficient allowance for total mass of mount bracket, this product, and camera etc.

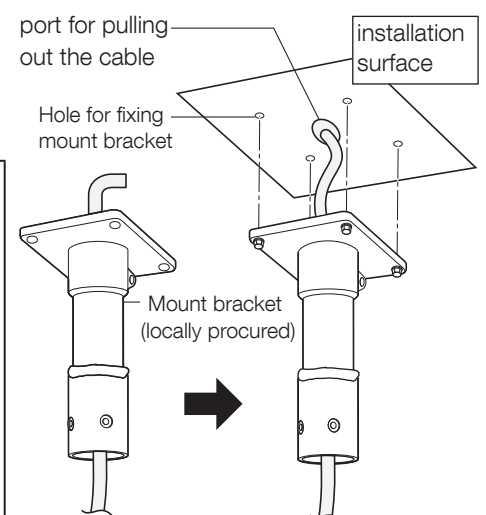

[4] Attach the camera to this product.


Connect each cable to the camera, and attach the camera to this product with the camera mounting screw (accessory) or the hexagon screw supplied with the camera. Refer to the Instruction Manual for details such as the recommended tightening torque for the camera mounting screws.

取扱説明書

工事説明付き

パイプ取付金具

品番 WV-Q123A

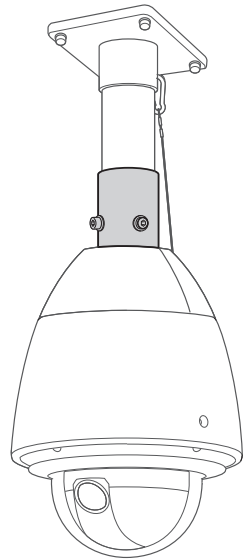

(取り付けイメージ)

このたびは、弊社製品をお買い上げいただき、まことにありがとうございます。

- 取扱説明書をよくお読みのうえ、正しく安全にお使いください。
- ご使用前に「安全上のご注意」を必ずお読みください。
- この取扱説明書は大切に保存してください。

取扱説明書に記載されていない方法や、指定の部品を使用しない方法で施工されたことにより事故や損害が生じたときには、当社では責任を負えません。また、その施工が原因で故障が生じた場合は、製品保証の対象外となります。

「日本エリア」でお使いの場合に限ります。日本以外でお使いの場合のサービスはいたしかねます。

パナソニック システムお客様ご相談センター

電話 フリーダイヤル **0120-878-410** 受付：9時～17時30分
※携帯電話・PHSからもご利用いただけます。 (土・日・祝祭日は受付のみ)

パナソニックi-PRO センシングソリューションズ株式会社

〒812-8531 福岡県福岡市博多区美野島四丁目1番62号

© Panasonic i-PRO Sensing Solutions Co., Ltd. 2019

設置上のお願

設置工事は電気設備技術基準に従って実施してください。

本金具の設置・接続を始める前に必要な周辺機器やケーブルを確認し、準備してください。接続する前に、カメラ、PC など接続する機器の電源を切ってください。

傷害防止のため、本金具は、設置の説明に従って取付金具（現地調達）にしっかりと取り付ける必要があります。

カメラの取付方法について

本金具は吊り下げ専用です。据え置きや傾けた状態で使用すると、正常に動作しなかったり、寿命が短くなる場合があります。

本金具を使用しなくなった場合は放置せず、必ず撤去してください。

設置する


天井に取り付ける場合を例に説明します。

【1】準備する。

カメラを取り付けるための金具（現地調達）を用意します。


重要

- 落下防止ワイヤーを取り付け可能な取付金具を用意してください。

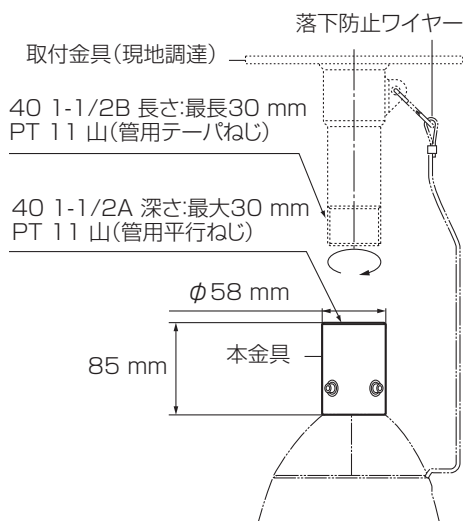

【2】取付金具（現地調達）にパイプ取付金具を取り付ける。

- ① 取付金具にパイプ取付金具を取り付けます。
- ② 本金具と取付金具の接合部をシリコンなどの防水材（現地調達）で防水処理します。

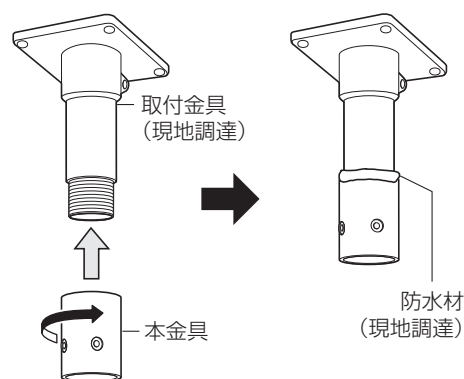

商品概要

本金具は、現地調達の取付金具にカメラを取り付けるための金具です。

対応機種の最新情報については、弊社のサポートウェブサイト (<https://sol.panasonic.biz/security/support/info.html> <管理番号：C0501、C0112 >) を参照してください。

付属品をご確認ください

取扱説明書(本書)..... 1冊
 カメラ取付ねじ(六角穴付ねじ(M6))..... 5本
 (1本は予備)

安全上のご注意 必ずお守りください

人への危害、財産の損害を防止するため、必ずお守りいただくことを説明しています。

■誤った使い方をしたときに生じる危害や損害の程度を区分して、説明しています。

警告

「死亡や重傷を負うおそれがある内容」です。

■お守りいただく内容を次の図記号で説明しています。



実行しなければならない内容です。

警告



■工事は販売店に依頼する

(工事には技術と経験が必要です。火災、感電、けが、器物損壊の原因となります。) →必ず販売店に依頼してください。



禁止

■専用のカメラ以外は取り付けない

(落下によるけがや事故の原因となります。)

仕様

使用温度範囲 - 50℃ ~ + 60℃

寸法 φ58 mm x 85 mm (H)

質量 約 200 g


仕上げ アルミダイカスト ファインシルバー

【3】取付金具（現地調達）を設置面に取り付ける。

- ① 取付金具にケーブルを通します。
- ② 取付金具を、取付場所に適したナットやアンカーボルトなど（現地調達）で、設置面に取り付けます。

重要

- 取り付け手順の詳細については、取付金具の取扱説明書をお読みください。
- 設置面の取付金具固定用ねじ穴およびケーブル引出し口を防水処理してから、取付金具を設置面に固定してください。
- 取付金具、本金具、カメラなどの総質量に対して十分な最低引抜強度を確保してください。

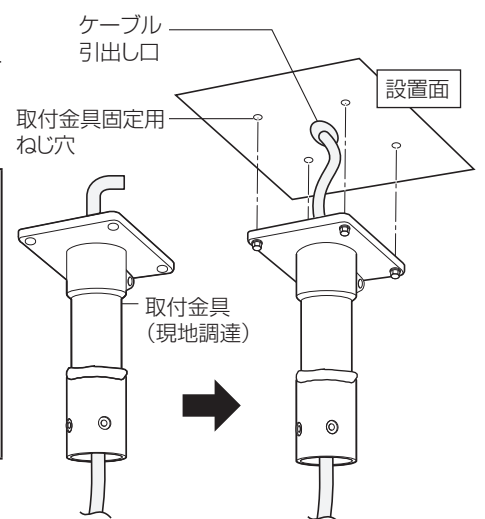

【4】パイプ取付金具にカメラを取り付ける。

カメラに各ケーブルを接続し、本金具に、カメラ取付ねじ（付属品）またはカメラに付属の六角穴付ねじでカメラを取り付けます。カメラ取付ねじの推奨締め付けトルクについてなど、詳細はカメラの取扱説明書を参照ください。