



*i-VMD Type2 : Intruder Detection / Loitering Detection / Direction Detection / Scene Change Detection / Object Detection / Cross Line Detection

Full HD / 1,920 x 1,080 60 fps H.264 Network Camera featuring Super Dynamic (WV-SPN631) HD / 1,280 x 720 60 fps H.264 Network Camera featuring Super Dynamic (WV-SPN611)

Key Features

- **1080p Full HD / 720p HD** images up to **60 fps**^{*1}
- Approximate 1/3 inches, high sensitivity MOS image sensor
- Super high resolution at Full HD/1,920 x 1,080 created by high sensitivity MOS image sensor. (WV-SPN631 only)
- **Multiple H.264 (High profile) streams (max. 4 streams)** and JPEG streams ensure simultaneous real time monitoring and high resolution recording.
- Maximum Screen Size is 2,048 x 1,536* @30 fps, H.264 (WV-SPN631 only)
* Used by super resolution techniques
- **Enhanced Super Dynamic**^{*1} and ABS (Adaptive Black Stretch) technologies deliver **133 dB** wider dynamic range compared to conventional cameras.
- **Multi process NR & 3D-DNR** ensures noise reduction in various conditions.
- **Smart coding Technology : Group of Pictures (GOP) control** function removes unnecessary information from the frame for realizing efficient encoding.
Auto VIQS (Variable Image Quality on Specified area) function recognizes the no movement area in a video automatically and lowering the resolution of it to reduce the data size.
With the latest bit rate reducing technology, **GOP control**, **Auto VIQS**, **3D-MNR** (Multi process Noise Reduction) and **FDF** (Frequency Divided Filter), the network bandwidth and the disk space of recorder can be saved.
- High sensitivity with Day/Night (ICR*) function:
WV-SPN631: 0.04 lx (Color), 0.01 lx (B/W) at F1.4
WV-SPN611: 0.01 lx (Color), 0.003 lx (B/W) at F1.4
* ICR: IR Cut filter Removal
- **IR LED** equipped: The equipped infrared LED makes it possible to take pictures at zero lx.(Extension Unit)
- **IR LED** is controlled to match the environment, thereby the camera provides clear images of human faces without white blur. (Extension Unit)
- **High Speed ABF (Auto Back Focus)** ensures easy installation.
- **VIQS** (Variable Image Quality on Specified area) technology allows the designated **eight areas** to retain higher image quality while the excluded area will have a decreased image quality, which enables to use lower image file size and bit rate.
- Cropping function enables to provide whole image and the part image simultaneously.
Up to 4 image capture areas can be specified, and it is also possible to control the sequence.
- **Face Super Dynamic** technology ensures clear face image.
- Electronic sensitivity enhancement: Auto (Up to 16/30s) / OFF
- Selectable light control modes:
Outdoor scene, Indoor scene (50 Hz) / Indoor scene (60 Hz), Fix shutter
Indoor scene (50 Hz/60Hz): Flicker caused by fluorescent lightning will be automatically compensated.
- 2x, 4x digital zoom controlled by browser
- **VMD (Video Motion Detection)** with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
- **Privacy Zone** can mask up to 8 private areas, such as house windows and entrances/exits.
- Alarm sources including 3 terminal input, VMD and Panasonic alarm command can trigger actions such as SDXC/SDHC/SD memory recording, FTP image transfer, E-mail notification, Indication on browser, Alarm terminal output, and Panasonic alarm protocol output.
- Full duplex bi-directional audio allows interactive communication between camera site and monitoring site.
- **Prioritized stream control**: One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
- **Double SDXC/SDHC/SD Memory card slots** for manual recording (H.264 / JPEG), alarm recording (H.264 / JPEG) and backup upon network failure (H.264 / JPEG). Realize long-term recording and auto backup function.
- **Face detection** function detects the position of human face and the information is sent by XML or video stream.(Extension Software)
- Can be added new intelligent extension software in addition to built-in VMD (Video Motion Detection), alarm function.
- **Fog compensation function** equipped as standard.
- **HLC (High Light Compensation)**: If a bright light source such as car headlights points in the direction of a camera, the camera corrects for strong lights and their surroundings to provide clear images of the areas.
- **Super Chroma Compensation** function realizes a better color reproducibility even in low illumination.
- H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management. Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.
- Internet mode: H.264 images can be transmitted over HTTP protocol.
- Multi-language: English / Italian / French / German / Spanish / Portuguese / Russian / Chinese / Japanese
- Supports SSL, DDNS (viewnetcam, RFC2136)
- Supports **Extension Units**: Hardware functions can be added by mounting an Extension Unit (IR LED unit, RS-485 Output unit) to the front or rear sides of the camera.

*1 Super Dynamic function is automatically set off on 60 fps mode

Optional Accessories

IR LED unit **WV-SPN6FRL1**

RS-485 Output unit **WV-SPN6R481**

Specifications


Camera	Image Sensor	Approx. 1/3 type MOS image sensor	
	Scanning Mode	Progressive scan	
	Scanning Area	WV-SPN631 : 5.28 mm (H) x 3.30 mm (V) (7/32 inches(H) x 1/8 inches(V)) WV-SPN611 : 4.86 mm (H) x 3.65 mm (V) (3/16 inches(H) x 5/32 inches(V))	
	Minimum Illumination	WV-SPN631 : Color : 0.04 lx, BW: 0.01 lx (F1.4, Maximum shutter : Max. 1/30s, Gain : On(High)) Color : 0.003 lx, BW: 0.0007 lx (F1.4, Maximum shutter : Max. 16/30s, Gain : On(High))*1	
		WV-SPN611 : Color : 0.01 lx, BW: 0.003 lx (F1.4, Maximum shutter : Max. Off (1/30s), Gain : On(High)) Color : 0.0007 lx, BW: 0.0002 lx (F1.4, Maximum shutter : Max. 16/30s, Gain : On(High))*1	
	White Balance	AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K)	
	Light Control Mode	Outdoor scene : Automatic integration of ALC and ELC / Indoor scene [50 Hz] : Automatic integration of ALC and ELC with flickerless / Indoor scene [60 Hz] : Automatic integration of ALC and ELC with flickerless / ELC/Fix shutter	
	Shutter Speed	[2 mega pixel [16 : 9]/60 fps mode]/ 1.3 mega pixel [16 : 9]/60 fps mode] Off(1/60), 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000	
		Other than [2 mega pixel [16 : 9]/60 fps mode]/ 1.3 mega pixel [16 : 9]/60 fps mode] Off(1/30), 3/100, 3/120, 2/100, 2/120, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000	
	Super Dynamic*2	On (High) / On (Normal) / Off	
	Face Super Dynamic	On / Off (only when Super Dynamic : On)	
	Adaptive Black Stretch	On / Off (only when Super Dynamic : Off)	
	Fog compensation	On / Off (only when Super Dynamic / Adaptive black stretch : Off)	
	High light compensation (HLC)	On / Off (only when Super Dynamic / Back light compensation : Off)	
	AGC	On (Low) / On (Mid) / On (High) / Off	
	Maximum shutter	max. 1/1000 s, max. 1/500 s, max. 1/250 s, max. 1/120 s, max. 2/120 s, max. 1/100 s, max. 2/100 s, max. 1/60 s, max. 1/30 s, max. 2/30 s, max. 4/30 s, max. 6/30 s, max. 10/30 s, max. 16/30 s	
	Day/Night (ICR)	Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC)	
	Dynamic Range	133 dB typ. (Super Dynamic : On)	
	Digital Noise Reduction	High / Low	
	Video Motion Detection	On / Off, 4 areas, Sensitivity : 15 steps, Detection size : 10 steps	
	Privacy Zone	On / Off (up to 8 zones available)	
	VIQS	On / Off (up to 8 zones available)	
	Camera Title (OSD)	On / Off, Up to 20 characters (alphanumeric characters, marks)	
	Focus Adjustment	Auto back focus / Focus / Adjusting method	
Browser GUI	Cropping	Off / JPEG(1) / JPEG(2) / JPEG(3) / H.264(1) / H.264(2) / H.264(3) / H.264(4) / H.264(all) Up to 4 image capture areas can be specified	
	Camera Control	Brightness, AUX On / Off	
	Display Mode	Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only), 20 characters camera title available.	
	Digital Zoom	1x, 2x, 4x controlled by browser GUI	
	Clock Display	Time : 12H/24H, Date : 5 formats on the browser, Summer time (Manual)	
	Alarm Control	Reset	
	One Shot Capture	A still picture will be displayed on a newly opened window.	
	Audio	Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High Audio Output : On / Off Volume adjustment : Low / Middle / High	
	SD Memory Data Download	Still or motion images recorded in the SDXC/SDHC/SD memory card can be downloaded.	
	GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese	
	System Log	Up to 100 (Internal) Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG), error logs	
	Supported OS*3	Microsoft® Windows® 8.1, Microsoft® Windows® 8, Microsoft® Windows® 7, Microsoft® Windows Vista®	
	Supported Browser	Windows® Internet Explorer® 11 (32-bit) Windows® Internet Explorer® 10 (32-bit) Windows® Internet Explorer® 9 (32-bit) Windows® Internet Explorer® 8 (32-bit) Windows® Internet Explorer® 7 (32-bit)	
	Network	Network IF	10Base-T / 100Base-TX, RJ45 connector
		Image Resolution	WV-SPN631
WV-SPN611			*1.3 mega pixel [16 : 9] (30/60 fps) 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 90 *1.3 mega pixel [4 : 3] (30 fps) 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 / 160 x 120
			Constant bit rate / Variable bit rate / Framerate priority / Best effort / Advanced VBR
H.264*4		Transmission Mode	Constant bit rate / Variable bit rate / Framerate priority / Best effort / Advanced VBR
		Frame Rate	1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 / 60 fps
		Bit Rate/Client	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 6,144 / 8,192 / 10,240 / 12,288 / 14,336 / 16,384 / 20,480 / 24,576 / 30,720 / 40,960 kbps
		Image Quality	Constant bit rate, Best effort : Low (Motion priority) / Normal / Fine (Image quality priority) VBR : 0 Super fine / 1 Fine / 2 / 3 / 4 / 5 Normal / 6 / 7 / 8 / 9 Low
		Smart Coding mode	On (Low / Mid / High) / Off (Only when "Variable bit rate" is selected)
JPEG		Refresh interval	0.2 / 0.25 / 0.33 / 0.5 / 1 / 2 / 3 / 4 / 5s
		Transmission Type	Unicast / Multicast
Audio Compression		Refresh interval	10 steps
		Transmission Type	0.1 fps - 30 fps (JPEG frame rate will be restricted when displaying both JPEG and H.264 images.) Pull / Push
Audio Mode		G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps / AAC-LC*5	
Authentication for Audio		Off / Mic input / Audio output / Interactive (Half duplex) / Interactive (Full duplex)	
Bandwidth control	Level 1 only / Level 2 or higher / All users		
Supported Protocol	IPV6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, DiffServ IPV4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, RTSP, FTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, DiffServ		

* Masses and dimensions are approximate. * Specifications are subject to change without notice.


Network	FTP Client	Alarm image transmission, FTP periodic transmission (When the FTP transmission is failed, backup on an optional SDXC/SDHC/SD memory card is available.)	
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)	
	SDXC/SDHC/SD Memory Card (Option)	H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure Compatible SD (SDHC/SDXC) card : Panasonic 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB** model *SDHC card, **SDXC card (except miniSD card and microSD card)	
	Employment of two SD cards	Dual Recording for Redundancy, Series Recording for long time	
	Cellular Phone Compatibility	JPEG image, AUX control (by access level)	
	Mobile Terminal Compatibility*6	iPad, iPhone, iPod touch (iOS 4.2.1 or later), Android™ mobile terminals	
	Alarm	Alarm Source	3 terminals input, VMD, Command alarm, Audio detection alarm
		Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, FTP image transfer, Panasonic protocol output
		Alarm Log	With SDXC/SDHC/SD memory card : Up to 50,000 logs for each SD memory card
	Schedule	Schedule mode	Alarm permission / VMD permission / Access permission / H.264 recording / Audio detection permission / Scene file / FTP periodic image transmission
		Monitor Output (for adjustment)	VBS: 1.0 V (p-p)/75 Ω, composite, RCA jack An NTSC or PAL signal can be outputted from camera.
	Input/Output	Microphone Input	ø3.5 mm monaural mini jack Input impedance: Approx. 2 kΩ (unbalanced) Recommended applicable microphone: Plug-in power type Supply voltage: 2.5 V ± 0.5 V Recommended sensitivity of microphone: -48 dB±3 dB (0 dB=1 V/Pa, 1 kHz)
		Line Input	Input level : Approx. -10 dBV
		Audio Output	ø3.5 mm stereo mini jack (monaural output) Output impedance: Approx. 600 Ω (unbalanced)
		External I/O Terminals	ALARM IN 1 (DAY/NIGHT IN), ALARM IN 2 (ALARM OUT), ALARM IN 3 (AUX OUT) UL (UL60950-1), C-UL (CAN/CSA C22.2 No.60950-1), CE, IEC60950-1
Power Source and Power Consumption (excluding Extension Units)		FCC (Part15 ClassA), ICES-003 ClassA, EN 55032 ClassB, EN55024 WV-SPN631: DC12 V : 430 mA/Approx. 5.1 W PoE (IEEE802.3af compliant) DC48 V : 130 mA/Approx. 6 W (Class 0 device) WV-SPN611: DC12 V : 390 mA/Approx. 4.6 W PoE (IEEE802.3af compliant) DC48 V : 120 mA/Approx. 5.6 W (Class 0 device)	
General	(including Extension Units)	WV-SPN631: DC12 V : 850 mA/Approx. 10.2 W PoE (IEEE802.3af compliant) DC48 V : 250 mA/Approx. 11.7 W (Class 0 device) WV-SPN611: DC12 V : 800 mA/Approx. 9.6 W PoE (IEEE802.3af compliant) DC48 V : 240 mA/Approx. 11.1 W (Class 0 device) * ONLY CONNECT DC12 V CLASS 2 POWER SUPPLY.	
	Ambient Operating Temperature	-10°C to +50°C (14 °F to 122 °F)	
	Ambient Operating Humidity	10 to 90 % (no condensation)	
	Dimensions	75.0 mm (W) x 57.0 mm (H) x 143.5 mm (D) (2-15/16 inches (W) x 2-1/4 inches (H) x 5-21/32 inches (D)) (excluding lens/ power cord plug)	
	Mass (approx.)	Approx. 400 g (0.88 lbs) excluding lens	
	Finish	Main body : PC/ABS resin (Sail white)	

*1 Converted value
*2 Super Dynamic function is automatically set off on 60 fps mode.
*3 For further information about PC system requirements and precautions for when using Microsoft® Windows® 8.1, Microsoft® Windows® 8, Microsoft® Windows® 7, Microsoft® Windows Vista®, or Windows® Internet Explorer®, click "Manual" - "Open" from the supplied CD-ROM and refer to "Notes on Windows® / Internet Explorer® versions".
*4 Transmission for 4 streams can be individually set.
*5 AAC-LC (Advanced Audio Coding - Low Complexity) is only used when recording audio on an SD memory card.
*6 For further information about compatible devices, refer to our website (<http://security.panasonic.com/pss/security/support/info.html>).

Part Names and Functions

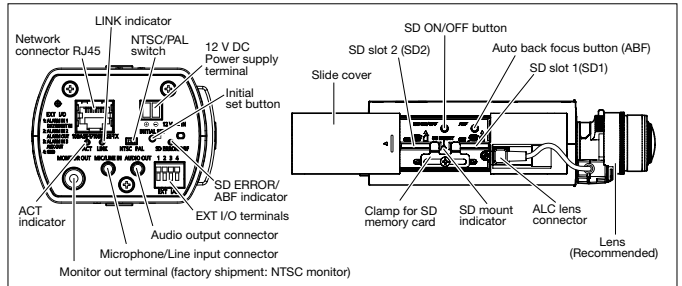

Appearance

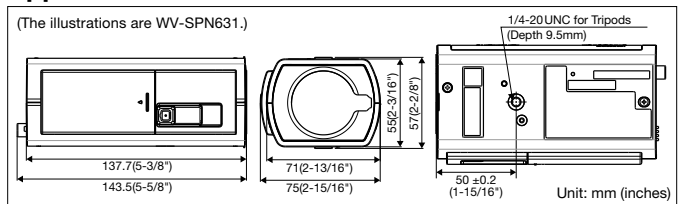

Trademarks and registered trademarks

– Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
– iPad, iPhone and iPod touch are registered trademarks of Apple Inc. Android is a trademark of Google Inc.
– "i-PRO SmartHD" logo is trademark or registered trademark of Panasonic Corporation.
– ONVIF and the ONVIF logo are trademarks of ONVIF Inc.

Important

– Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product.
– Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

DISTRIBUTED BY :

Panasonic

<http://security.panasonic.com>



<http://www.facebook.com/PanasonicNetworkCamera>

(2A-123CL)