

HD Vandal Resistant Outdoor Compact Dome Network Camera

Panasonic WV-S3511L is a compact & simple design multifunction camera that achieves high visibility even under extreme conditions and can be placed in a small space without damaging the landscape. Intelligent Auto (iA) allows the camera to automatically adjust the key settings in real-time depending on the scenery and movement, reducing distortion such as motion blur and moving objects. New industry-leading 134dB dynamic range delivers balanced scene exposure in dynamic and extreme-backlit lighting environments. In addition, color night vision provides outstanding low-light performance with accurate color rendition and saturation from i-Pro's 1/3" sensor, rivaling the performance of costlier 1/2" sensor cameras in the market. By adopting H.265 Smart Coding technology, intelligently reduces bandwidth efficiency of up to 95%* more than conventional H.264 for longer recording and less storage. Cameras out-of-the-box, use an encryption module standardized by FIPS Publication 140-2 for secure video streaming.

*Value in Advanced mode with Smart Facial Coding depends on scene.

Extreme image quality allows evidence to be captured even under challenging conditions

- Auto Shutter speed control for fast moving vehicles with Intelligent Auto
- Sharp and clear images of a walking person day & night
- Outstanding low light performance in true color with low noise for night time applications
- Super Dynamic 134dB for backlit situations involving headlights and shadows on night streets
- Built-in IR LED to produce a clear monochrome image in 0 lux conditions with 15 m (49 feet) irradiation distance
- Wide area surveillance even in compact design. moreover, corridor mode to survey vertically long area.
- Environmental durability : IP66, IK10

Extreme bandwidth compression with new Panasonic H.265 Smart Coding

- Longer recording and less storage compared to any H.264 based compression techniques
- New self-learning ROI* encoding (Auto VIQS) detects movement within the image and compresses the areas with little motion in order to reduce transmitted data while maintaining the quality of the image.
- New "Smart Facial Coding" adds more bandwidth reduction for ID camera applications mainly capturing faces

*Region of Interest

Extreme Data Security

- Full encryption microSDXC/microSDHC/microSD card edge recording to keep your data safe
- FIPS140-2 CAVP compliant *Using encryption module standardized by FIPS publication 140-2
- Full end-to-end system encryption with supported VMS and devices to protect from IP snooping/spoofing and detect data alteration

Key Features

- HD 720p up to 60fps
- iA (intelligent Auto)
- Extreme Super Dynamic 134dB
- Color night vision (0.0013 to 0.02 lx)
- H.265 Smart Coding
- Built-in IR LED
- Corridor mode
(90 degrees or 270 degrees in image rotation)
- i-VMD License Bundled
- Onvif Profile G / S / T

Industry examples

- Education
- Retail
- Bank (ATM)
- Building




Specifications

| | | | |
|------------------------|--|---|--|
| Camera | Image Sensor | Approx. 1/3 type CMOS image sensor | |
| | Minimum Illumination | Color : 0.02 lx, BW : 0.01 lx (F2.3, Maximum shutter : Off (1/30s), AGC : 11) BW : 0 lx (F2.3, Maximum shutter : Off (1/30 s), AGC : 11, when the IR LED is lit) Color : 0.0013 lx, BW : 0.0007 lx (F2.3, Maximum shutter : max. 16/30s, AGC : 11) *1 | |
| | White Balance | AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K) | |
| | Maximum shutter | Max. 1/10000 s to Max. 16/30 s | |
| | Intelligent Auto | On / Off | |
| | Super Dynamic ² | On / Off. The level can be set in the range of 0 to 31. | |
| | Dynamic Range | Max.134 dB typ. (Super Dynamic : On) | |
| | Adaptive Black Stretch | The level can be set in the range of 0 to 255. | |
| | Back light compensation / High light compensation | BLC (Back light compensation) / HLC (High light compensation) / Off (only when Super dynamic / Intelligent Auto : Off) | |
| | Fog compensation | On / Off (only when Intelligent auto / auto contrast adjust : Off) | |
| | Maximum gain | The level can be set in the range of 0 to 11. | |
| | Color/BW (ICR) | Off / On (IR Light Off) / On (IR Light On) / Auto1 (IR Light Off) / Auto2 (IR Light On) / Auto3 (SCC) | |
| | IR LED Light | High / Middle / Low / Off, Maximum irradiation distance : 15 m (Approx. 49 ft) | |
| | Digital Noise Reduction | The level can be set in the range of 0 to 255. | |
| | Video Motion Detection (VMD) | On / Off, 4 areas available | |
| | Intelligent VMD (i-VMD) ³ | Type 4 *Bundled License | |
| | Privacy Zone | On / Off. Up to 8 zones available | |
| | Image rotation ⁴ | 0 ° / 90 ° / 180 °(Upside-down) / 270 ° | |
| Mirror | On / Off | | |
| Camera Title (OSD) | On / Off. Up to 20 characters (alphanumeric characters, marks) | | |
| Lens | Zoom Ratio | 1 x Optical | |
| | Digital (electronic) zoom | Choose from 3 levels of x1, x2, x4 | |
| | Focal length | 2.8 mm (1/8 inches) | |
| | Angular Field of View | [16 : 9 mode] Horizontal : 97° Vertical : 54° | |
| | | [4 : 3 mode] Horizontal : 97° Vertical : 72° | |
| | Maximum Aperture Ratio | 1 : 2.3 | |
| Focus range | 0.5 m (19-11/16 inches) – ∞ | | |
| Adjusting Angle | Horizontal (PAN) angle : ±45°, Vertical (TILT) angle : 0 to +90°, Azimuth (YAW) angle : ±90° | | |
| Browser GUI | Camera Control | Brightness | |
| | GUI / Setup Menu Language | English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese | |
| Network | Network IF | 10Base-T / 100Base-TX, RJ45 connector | |
| | Resolution | *1.3 mega pixel [16 : 9] (30/60 fps) 1,280 x 720 / 640 x 360 / 320 x 180 | |
| | H.265 / H.264 JPEG (MJPEG) | *1.3 mega pixel [4 : 3] (30 fps) 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 | |
| | H.265 / H.264 ⁵ | Transmission Mode | Constant bit rate / VBR / Frame rate / Best effort |
| | H.265 / H.264 ⁵ | Transmission Type | Unicast / Multicast |
| | JPEG | Image Quality | 10 steps |
| | Smart Coding | GOP(Group of pictures) control [When H.264 is selected] On(Mid) / On(Low) / Off [When H.265 is selected] On(Frame rate control) / On(Advanced) / On(Mid) / On(Low) / Off Smart Facial Coding* Off / On(AUTO VIQS) / On(Smart Facial Coding) *Smart Facial Coding is only available with Stream(1). | |

| | | |
|---------------------|--|--|
| Network | Audio Compression | G.726 (ADPCM) : 16 kbps / 32 kbps G.711 : 64 kbps AAC-LC ⁶ : 64 kbps / 96 kbps / 128 kbps |
| | Supported Protocol | IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ |
| Alarm | No. of Simultaneous Users | Up to 14 users (Depends on network conditions) |
| | microSDXC/microSDHC/microSD Memory Card ^{7,8} | H.265 / H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure Compatible microSDXC/microSDHC/microSD Memory Card : Panasonic 2 GB, 4 GB, 8 GB, 16 GB, 32 GB, 64 GB*model *microSDHC card, **microSDXC card |
| | Mobile Terminal Compatibility | iPad, iPhone, Android™ terminals |
| Input/Output | ONVIF Profile | G / S / T |
| | Alarm Source | VMD alarm ⁹ , Command alarm, Audio detection alarm |
| General | Alarm Actions | microSDXC/microSDHC/microSD memory recording, E-mail notification, HTTP alarm notification/Indication on browser, FTP image transfer, Panasonic alarm protocol output |
| | Built-in microphone | Nondirectional electret condenser microphone |
| | Safety | UL (UL60950-1 2Ed), c-UL (CAN/CSA C22. NO.60950-1-07), CE, IEC60950-1 |
| | EMC | FCC (Part15 Subpart B, ClassA, SDoC), ICES-003 ClassA, EN55032 ClassB, EN55024, ECE-R10, EN50498, EN50121 |
| | Power Source and Power Consumption | PoE (IEEE802.3af compliant) Device : DC48 V 80 mA, Approx. 3.8 W (Class 2 device) |
| | Ambient Operating Temperature | -30 °C to +50 °C (-22 °F to 122 °F) {Power On range : -20 °C to +50 °C (-4 °F to +122 °F)} |
| | Ambient Operating Humidity | 10 to 100 % (no condensation) |
| | Water and Dust Resistance | IP66 (IEC60529), Type 4X(UL50), NEMA 4X compliant |
| | Shock Resistance | IK10 (IEC 62262) |
| | Railway Application | EN50155 : 2017 Class OT2/ST2 (EN 50155 : 2007 Class TX), IEC62236-3-2 |
| | Dimensions | ø109 mm x 53 mm (H) (ø4-9/32 inches x 2-3/32 inches (H)) Dome radius 27 mm (1-1/16 inches) |
| Mass (approx.) | Approx. 410 g (0.91 lbs) | |
| Finish | Main body : Aluminum die cast, Light gray Dome section : Polycarbonate resin, Clear | |

- *1 Converted value
- *2 Super Dynamic function is automatically set off on 60 fps mode.
- *3 Smart Facial Coding, i-VMD can not be used at the same time.
- *4 Settings of [90 °] and [270 °] are only available for the [16 : 9 mode].
- *5 Transmission for 4 streams can be individually set.
- *6 When recording audio on an microSDXC/microSDHC/microSD memory card, only use AAC-LC (Advanced Audio Coding - Low Complexity).
- *7 The replacement cycle (target) of a microSD memory card differs from that of a standard size SD memory card. For details, check the content of the Panasonic Support website ([https:// security.panasonic.com/support/info/](https://security.panasonic.com/support/info/) (Control No.: C0117>)).
- *8 For details, check the content of the Panasonic Support Web Site (<https://security.panasonic.com/support/info/> <Control No.: C0107><Control No.: C0306><Control No.: C0307>)
- *9 Including alarms from Plug-in Software

Appearance

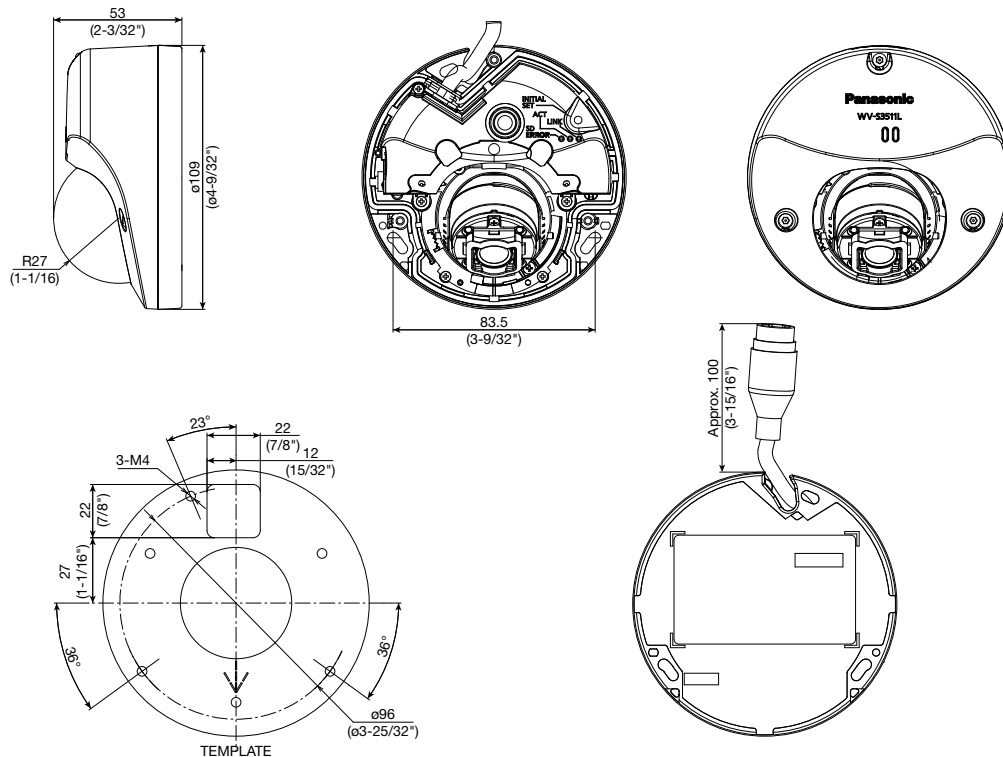

Bundled License

Plug-in Software for i-VMD

i-VMD is possible to detect objects in the specified area by advanced video analysis technology.








i-VMD : Intruder Detection, Loitering Detection, Direction Detection, Scene Change Detection, Object Detection, Cross Line Detection



Notification sent to the monitoring screen

Optional Accessories

Mount Bracket / Dome Cover / Other

| | | | | | |
|---|--|---|---|---|---|
| <p>Base bracket WV-QJB502-G (Gray)</p>  | <p>Ceiling Mount Bracket WV-QCL101-W (i-PRO white)</p> <p>*For indoor installation only</p>  | <p>Wall Mount Bracket WV-QWL500-G (Gray)</p>  | <p>Adapter Box WV-QJB500-G (Gray)</p> <p>(This bracket requires WV-QWL500-G.)</p>  | <p>Pole Mount Bracket WV-Q182 (Light gray)</p> <p>(This bracket requires WV-QWL500-G.)</p>  | <p>Corner Mount Bracket WV-Q183 (Light gray)</p> <p>(This bracket requires WV-QWL500-G.)</p>  |
| <p>Dome Cover (Smoke type) WV-CW6SA</p>  | | | | | |

• Brackets are available in four colors, Fine silver, Light gray, Gray and i-PRO white. It is possible to use them in different color combinations.

Important

- Safety Precaution : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.
- Android is a trademark of Google LLC.
- ONVIF is trademarks or registered trademarks of Onvif Inc.
- All other trademarks identified herein are the property of their respective owners.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

Panasonic®

Panasonic Corporation

Panasonic i-PRO Sensing Solutions Co., Ltd.

<https://ipro.panasonic.com>

<https://security.panasonic.com>

<https://www.linkedin.com/company/i-pro-sensing-solutions-co-ltd/>