## D-sub to S-Video adaptor cable

# ET-ADS

#### Description

This adaptor is designed for input of S-Video signal to a Panasonic projector.

Specifications Dimensions (W  $\times$  L):  $34 \times 400 \text{ mm}$ 

 $(1-11/32" \times 15-3/4")$ 


Approx. 64.5 g\* (2.3 oz\*) Weight:

Applicable projector: PT-LW25H/LX30H/LX26H/LX26/LX22

 $\star$  Average value. May differ depending on models.

### **Appearance**

**Projector** S-Video cable

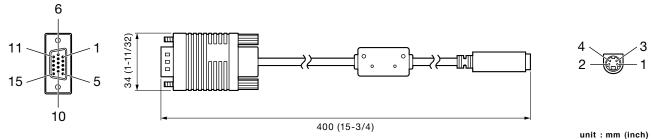

NOTE: This illustration is not drawn to scale.

#### D-sub HD 15-pin (male)

No.	Signal name
1	Chrominance signal (C)
2	Luminance signal (Y)
3	_
4	-
5	-
6	GND (chrominance signal)
7	GND (luminance signal)
8	-
9	-
10	-
11	-
12	-
13	-
14	-
15	-

## Mini DIN 4-pin (female)

No.	Signal name
1	GND (luminance signal)
2	GND (chrominance signal)
3	Luminance signal (Y)
4	Chrominance signal (C)

 $Weights \ and \ dimensions \ shown \ are \ approximate. \ Specifications \ subject \ to \ change \ without \ notice.$